



## **Hobut CT105 Series 3 Phase Current Transformer - Summary Sheet**

## **Summary**

A compact and convenient solution for three phase systems, the CT105 Series 3 Phase CT from Hobut is suitable for primary ranges from 100A-250A with a 5A secondary. It is supplied with a terminal cover and a choice of fixings, and boasts class 1 accuracy. Suitable for installation onto cables or busbars up to 21mm in size. They have an overall width of 105mm, allowing installation directly on top of moulded case circuit breakers. N.B. No CT cable is supplied with this product, please purchase seperately if required.

Product Code CT###105

Availability 5 Day
CT Type Solid Core
Aperture 21mm


Ratios Available 100/5 | 125/5 | 150/5 | 160/5 | 200/5 | 250/5

\* ### denotes ratio required.

## **Specification**

- Conforms to IEC185, BS 7626, BSEN 60044-1 and IEC 60044-1.
- Rated system voltage 0.72/3kV.
- Ambient temperature range -30°C to 80°C.
- Frequency range 50-60Hz.
- Insulation level 3kV for 1 minute.
- Continuous current 1.2 x rated current
- All models are 2.5VA class 1.

## **Dimensions**

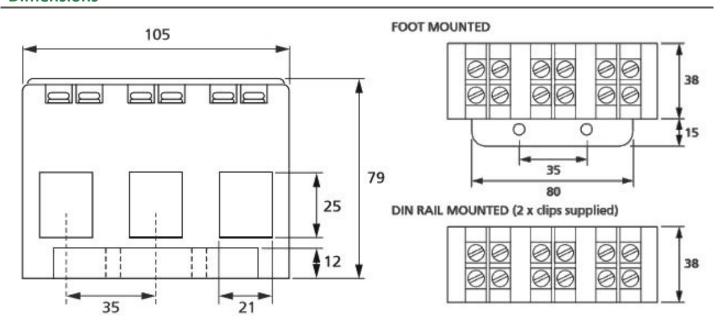

Web: www.stephenpwales.co.uk | Email: sales@stephenpwales.co.uk | Phone: 01803 295430 | Fax: 01803 212819