




Crompton SC2 Split Core Current Transformers - Summary Sheet

The SC2 range of split core current transformers from Crompton are quick and easy to install and can be foot or bus bar mounted. Boasting class 0.5 accuracy, (dependant on ratio and burden VA), they provide high quality comprehensive measurements at a cost-effective price. This range has an aperture of 50x80mm and support loads from 250A to 1000A. N.B. No CT cable is supplied with this product, please purchase separately if required.

Specification

CT Type	Split Core
Aperture	50x80mm
Lead Length	Not Included (available separately)
Operating Temperature	-20°C to +70°C
Flame Retardant Properties	UL 94V-0
Certification	CE

Dimensions

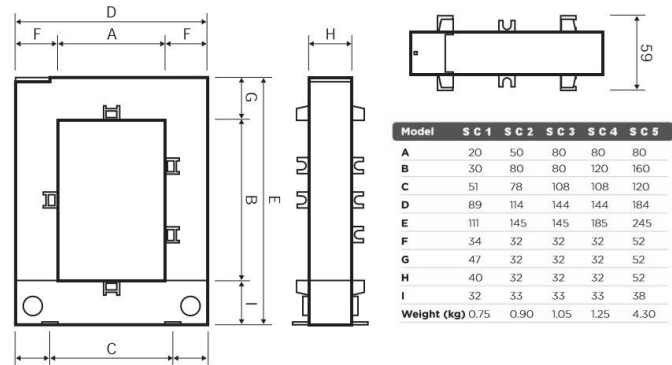

Range

SPW Part Code	Manufacturer Part Code	Ratio	Burden Against Class Index		
			Class 0.5	Class 1	Class 3
CT250SC2	SC2-250/5A	250/5A	1VA	2VA	4VA
CT300SC2	SC2-300/5A	300/5A	1.5VA	3VA	6VA
CT400SC2	SC2-400/5A	400/5A	1.5VA	3VA	10VA
CT500SC2	SC2-500/5A	500/5A	2.5VA	5VA	15VA
CT600SC2	SC2-600/5A	600/5A	2.5VA	5VA	15VA
CT750SC2	SC2-750/5A	750/5A	3VA	6VA	20VA
CT800SC2	SC2-800/5A	800/5A	3VA	7.5VA	20VA
CT1000SC2	SC2-1000/5A	1000/5A	5VA	10VA	20VA

Related Products



T24 – Split Core Current Transformer



T36 – Split Core Current Transformer



Crompton SC1 – Split Core Current Transformer

Web: www.spwales.com | Email: sales@spwales.com | Phone: 01803 295430 | Fax: 01803 212819

While Stephen P Wales Ltd has made every reasonable effort to ensure the accuracy of this information, Stephen P Wales Ltd does not guarantee that it is error-free, nor does Stephen P Wales Ltd make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. Stephen P Wales Ltd reserves the right to make any adjustments to the information contained herein at any time without notice.